


A1 / A2 CABLE GLAND

Application : A2 Brass Cable Glands generally for indoor and outdoor cable gland suitable for all types of unarmoured cables, plastic or rubber sheathed cables.

Design features : BS6121: part 1 :1989, Outer displacement seal

Material : Brass

Finish : Natural brass or Nickel plated.

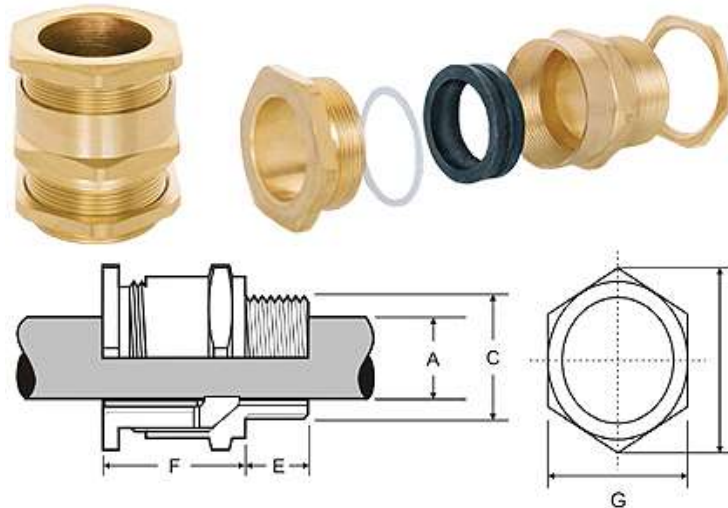

| Product Code | Size | Cable Dimensions | | Gland Dimensions | | | | |
|--------------|------|------------------|-------------|------------------|-------|---------------------------|----------------------|-----------------------|
| | | Min. Dia mm | Max. Dia mm | ISO Entry Thread | | Length from shoulder F mm | Across Flat Dia G mm | Across cross dia H mm |
| | | | | C mm | E mm | | | |
| CA216S | 16S | 3.50 | 7.00 | M16 | 10.00 | 20.00 | 21.00 | 24.00 |
| CA216L | 16L | 4.50 | 8.50 | M16 | 10.00 | 22.00 | 21.00 | 24.00 |
| CA220S | 20S | 8.00 | 11.50 | M20 | 10.00 | 24.00 | 22.00 | 24.00 |
| CA220L | 20L | 11.00 | 14.00 | M20 | 10.00 | 24.00 | 24.00 | 26.00 |
| CA225S | 25S | 14.00 | 17.50 | M25 | 10.00 | 25.00 | 27.00 | 30.00 |
| CA225L | 25L | 17.50 | 20.00 | M25 | 10.00 | 26.00 | 30.00 | 33.00 |
| CA232S | 32S | 20.00 | 23.00 | M32 | 10.00 | 28.00 | 36.00 | 40.00 |
| CA232L | 32L | 23.00 | 26.00 | M32 | 10.00 | 28.00 | 36.00 | 40.00 |
| CA240S | 40S | 26.00 | 30.00 | M40 | 13.50 | 31.00 | 44.00 | 49.00 |
| CA240L | 40L | 30.00 | 33.00 | M40 | 13.50 | 31.00 | 46.00 | 50.00 |
| CA250S | 50S | 33.00 | 40.00 | M50 | 14.00 | 33.00 | 55.00 | 61.00 |
| CA250L | 50L | 38.00 | 44.00 | M50 | 14.00 | 33.00 | 58.00 | 64.00 |
| CA263S | 63S | 44.00 | 50.00 | M63 | 14.00 | 35.00 | 67.00 | 74.00 |
| CA263L | 63L | 50.00 | 55.00 | M63 | 14.00 | 35.00 | 69.00 | 76.00 |
| CA275S | 75S | 56.50 | 62.00 | M75 | 15.00 | 35.00 | 78.00 | 87.00 |
| CA275L | 75L | 62.00 | 65.00 | M75 | 15.00 | 35.00 | 81.00 | 90.00 |
| CA290S | 90S | 68.00 | 75.00 | M90 | 20.00 | 50.00 | 100.00 | 112.00 |
| CA290L | 90L | 68.00 | 78.00 | M90 | 20.00 | 50.00 | 100.00 | 112.00 |