

## BW CABLE GLAND (4 PART )


**Application** : BW Brass Gland generally for Dry Indoor Situation and Indoor Gland for Plastic or Rubber Insulated, Single Wired Armoured, Plastic or Rubber over Sheathed Cables.

**Design features** : BS6121: part 1 :1989, 3 part armour lock with cone and lock ring provided for additional grip to armour.

**Ingress Protection:** IP3X

**Material** : Brass

**Finish** : Natural brass or Nickel plated

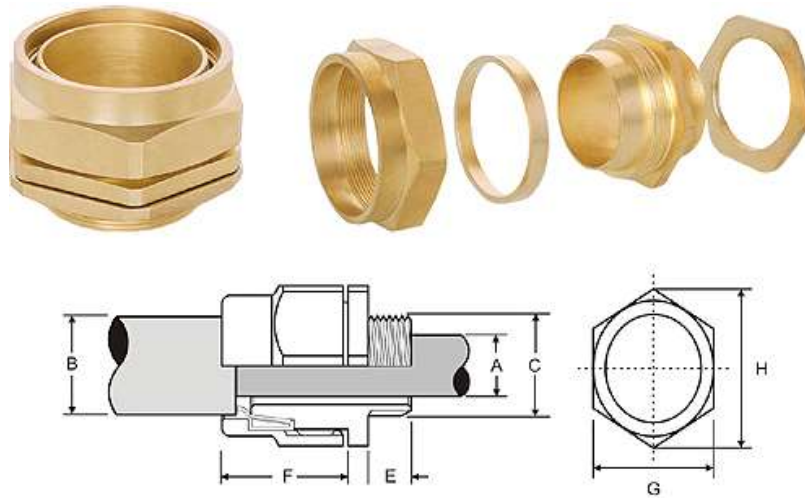

Product Code	Size	Cable Dimension			Gland Dimensions				
		Armour wire Diameter	Under Armour Dia A Max mm	Over all Dia B Max. mm	ISO Entry Thread		Length from shoulder F mm	Across Flat Dia G mm	Across cross dia H mm
					C mm	E mm			
CBW16S	16S	0.9	8.00	12.00	M16	9.00	20.00	20.00	22.00
CBW16L	16L	0.9/1.25	8.60	13.50	M16	9.00	20.00	20.00	22.00
CBW20S	20S	0.9/1.25	12.30	17.00	M20	9.00	20.00	22.00	24.00
CBW20L	20L	0.9/1.25	14.30	20.00	M20	9.50	20.00	25.00	27.00
CBW25S	25S	0.9/1.25	19.00	23.25	M25	9.50	22.00	31.00	34.00
CBW25L	25L	0.9/1.25	20.40	27.00	M25	9.50	22.00	33.50	37.00
CBW32S	32S	1.6/2.0	23.50	28.50	M32	9.50	25.00	35.00	38.50
CBW32L	32L	1.6/2.0	26.50	33.50	M32	9.50	25.00	40.00	45.00
CBW40S	40S	1.6/2.0	31.00	37.50	M40	12.50	25.00	44.50	49.00
CBW40L	40L	1.6/2.0	33.00	41.50	M40	12.50	25.00	48.50	54.00
CBW50S	50S	2.0/2.5	39.50	48.00	M50	12.50	28.00	56.50	63.50
CBW50L	50L	2.00/2.50	44.00	54.00	M50	12.50	30.00	61.00	68.00
CBW63S	63S	2.5	50.50	60.50	M63	14.00	33.00	69.50	77.00
CBW63L	63L	2.5	56.00	65.00	M63	14.00	33.00	75.50	84.50
CBW75S	75S	2.5	62.50	72.00	M75	14.00	40.00	83.50	93.00
CBW75L	75L	2.50/3.15	67.50	78.50	M75	14.00	40.00	89.50	99.00
CBW90S	90S	3.15	75.00	85.00	M90	20.00	48.00	100.00	110.00
CBW90L	90L	3.15	78.00	88.50	M90	20.00	48.00	102.00	115.00