



CW CABLE GLAND


Application : CW Brass Cable Gland generally for dry indoor and outdoor situation gland for plastic or rubber insulated, single wired armoured, plastic or rubber sheathed cables. Cables with extruded or lapped bedding.

Design features : BS6121: part 1 :1989, 4part armour lock with cone and locking provided for Additional grip to the armour

Ingress Protection: IP66

Material : Brass or Aluminium

Finish : Natural brass or Nickel plated or natural aluminium

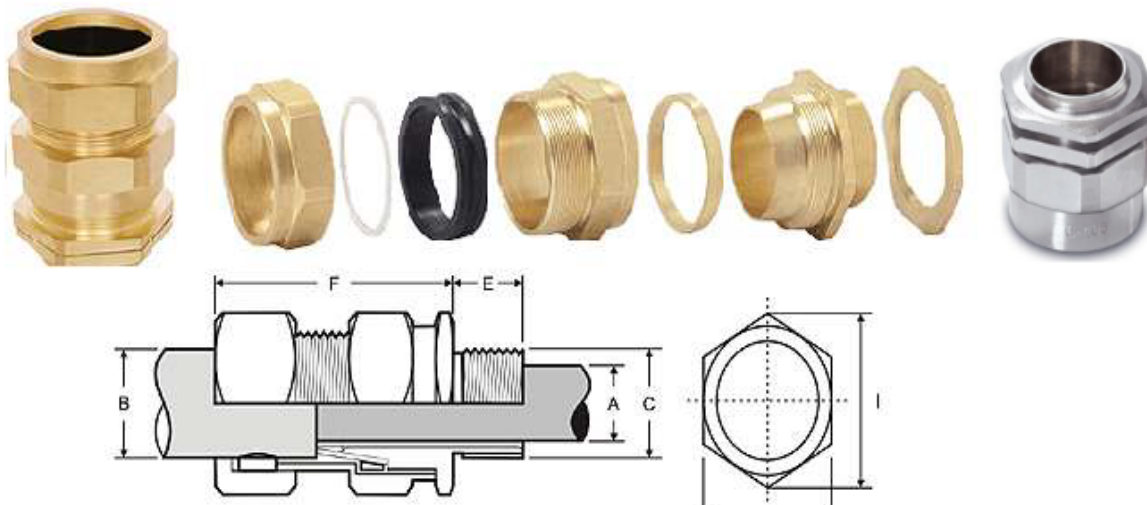

Product Code	Size	Cable Dimension			Gland Dimensions				
		Armour wire Diameter	Under Armour Dia A Max mm	Over all Dia B Max. mm	ISO Entry Thread		Length from shoulder F mm	Across Flat Dia G mm	Across cross dia H mm
					C mm	E mm			
CCW16S	16S	0.9	8.00	11.00	M16	10.00	40.00	20.00	23.00
CCW16L	16L	0.9/1.25	9.00	13.50	M16	10.00	40.00	20.00	23.00
CCW20S	20S	0.9/1.25	12.50	15.00	M20	10.00	42.00	22.00	24.00
CCW20L	20L	0.9/1.25	14.30	19.00	M20	10.00	42.00	26.00	29.00
CCW25S	25S	0.9/1.25	19.00	23.60	M25	10.00	44.00	31.00	34.00
CCW25L	25L	0.9/1.25	20.70	27.00	M25	10.00	44.00	34.90	38.00
CCW32S	32S	1.6/2.0	26.50	31.00	M32	10.00	46.00	41.00	45.70
CCW32L	32L	1.6/2.0	27.00	32.50	M32	10.00	46.00	41.25	46.00
CCW40S	40S	1.6/2.0	31.70	37.50	M40	13.50	50.00	55.00	50.00
CCW40L	40L	1.6/2.0	33.00	39.00	M40	13.50	50.00	49.00	54.00
CCW50S	50S	2.0/2.5	39.50	46.00	M50	14.00	57.00	56.50	62.70
CCW50L	50L	2.00/2.50	44.00	50.00	M50	14.00	57.00	62.30	69.50
CCW63S	63S	2.5	50.50	59.00	M63	14.00	70.00	72.50	81.00
CCW63L	63L	2.5	56.00	62.00	M63	14.00	61.00	76.00	85.00
CCW75S	75S	2.5	62.50	71.00	M75	15.00	65.00	85.00	95.00
CCW75L	75L	2.50/3.15	67.50	77.50	M75	15.00	66.00	91.00	103.00
CCW90S	90S	3.15	76.00	84.00	M90	20.00	80.00	100.00	110.00
CCW90L	90L	3.15	78.00	88.50	M90	20.00	82.00	103.00	114.00